




# WINDOW



General Information	
description	internal windows or glass wall
type	B15WFG1
manufacturer	Blu Bud srl
Application	
fire properties	B15 Class fire resistant
certificates, approvals	RINA MED Module B Nr. MED080914CS/003
drawing number	B15WFG1
Size	
max horizontal clear opening (LNO)	1300 mm
max vertical clear opening (LNV)	2200 mm
horizontal cut in bulkhead (TPO)	LNO + 100 mm + 10 mm
vertical cut in bulkhead (TPV)	LNV + 100 mm + 10 mm
Frame	
section shape	see dwg
section size	see dwg
thickness of steel	1,5 mm
materials	steel or stainless steel (ss)
finishing	raw, paint, brushed or polished (ss)
counter frame thickness	1,5 mm
Leaf	
glass	PYROBEL
thickness minimum of glass	17 +/- 1 mm
thickness of window	65 mm
Accessories	
decoration	custom request
Mechanical and physical properties	
noise reduction	n.a.

Product data sheet


B15\_window\_rev00

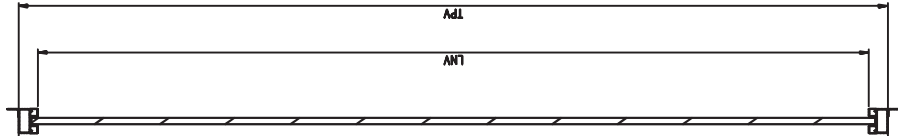

SEZIONE A-A

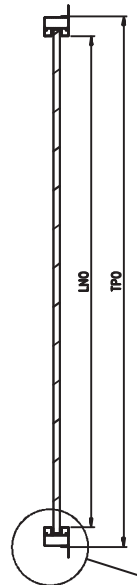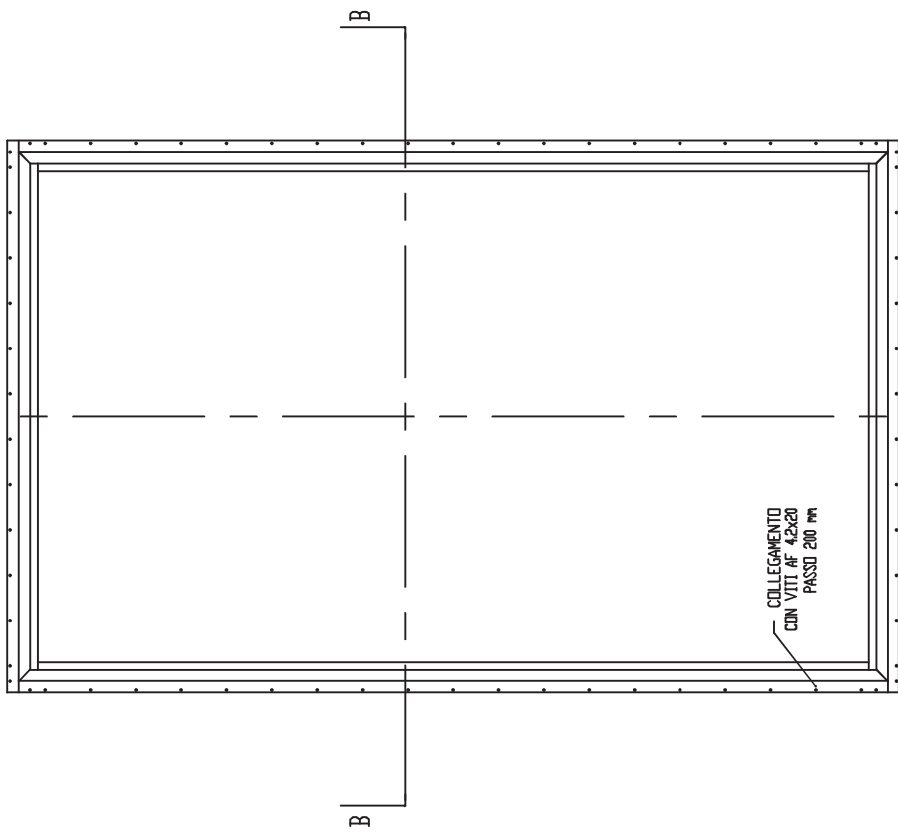

SEZIONE B-B

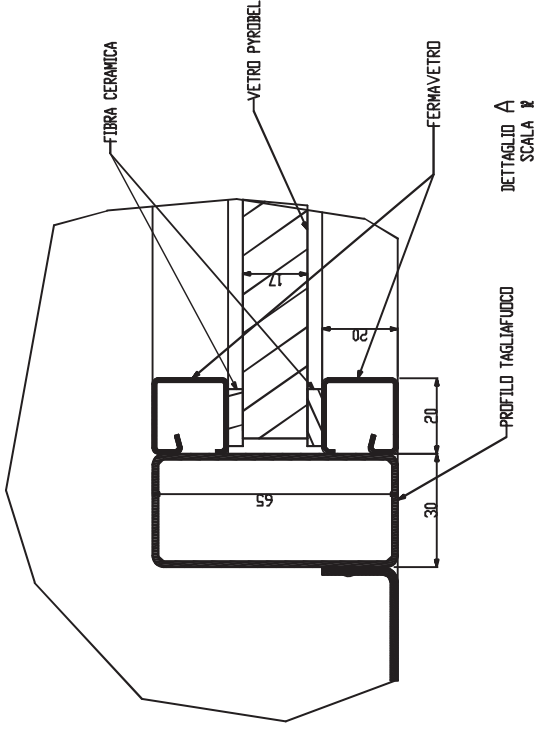

DETTAGLIO A  
SCALA 2

REV.	DATA / DATE	DESCRIZIONE DELLE MODIFICHE / DESCRIPTION OF ALTERATIONS	Controllato / Checked	Modificato / Revised
Riferimento / Reference	U. TEC. BLUBUD			
Descrizione / Description	B15 Glazed Wall - B15WFG1			
Materiale / Material	BLUBUD srl Sede operativa: Operational office: Via Ivo, 5/3 16128 Genova - ITALY Tel. +39. 010. 8183.033 Fax. +39. 010. 8183.033		Scala / Scale	1:20
Spessore / Thickness	Peso netto / Kg Net Weight / Kg		Controllato da / Checked by	Disegnato da / Drawn by
Note / Notes			P.M.	G.T.
Tolleranza generale / General Tolerance	A4		Classe prodotto / Typology	B15WFG1
		1/1	Codice / Code	
Questo disegno non può essere usato o riprodotto senza nostra autorizzazione / This drawing cannot be copied, duplicated or disclosed without our permission				

