




Datasheet n. 105

BLU FOAM[®]

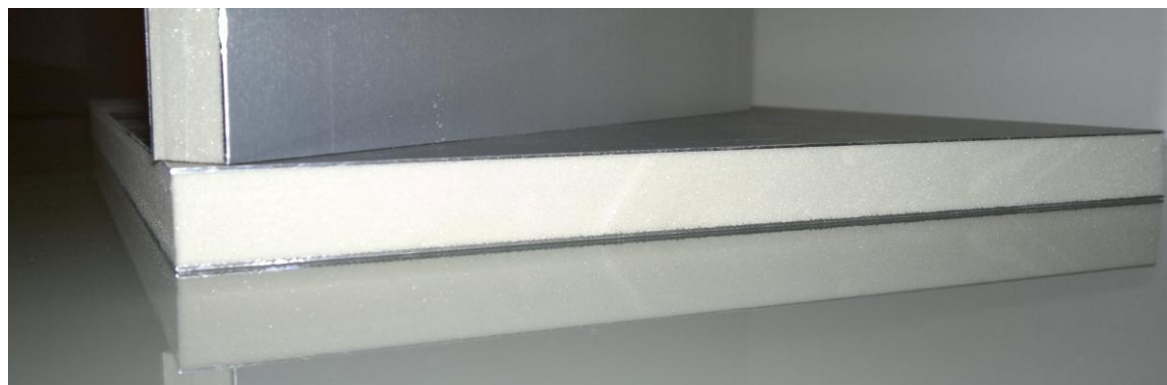

Product data sheet

General Information	
description	floor, wall and ceiling covering panels
type	16_BLUFOAM_7_7
manufacturer	Blu Bud srl
Application	
fire properties	low flame-spread characteristics
certificates, approvals	RINA MED Module B Nr. MED094114CS
Size	
width	standard 1200 mm + toll. (± 1 mm)
length	standard 2500 mm + toll. (± 1 mm)
thickness of panel	standard 16 mm
thickness core certificated	< 14 mm
thickness skins certificated	> 0,6 mm
Structure	
core	self extinguish rigid foam – 150 kg/m ³
thickness of core	14 mm
skins	raw aluminium sheets
thickness of skins	0,7 mm
skins coating	carpet, tiles, marble, granite, wood
Accessories	
upon request	
Mechanical and physical properties	
weight	5,70 \pm 5% kg/m ²
elasticity	UNI-EN 310 5800 N/mm ²
distributed load	250 kg/m ²
deflection (for 600x600 mm panel size with corners supported)	1,2 mm
service temperature	-10°C; +70°C
sound insulation	UNI- EN ISO 717-1 30 dB (RW)

BluFoam_rev01

Sede operativa:
Via Ilva, 5/3
16128 Genova, Italia

Sede legale:
Via Fieschi, 20/9
16121 Genova, Italia

info@blubud.it
t +39 010 86 01 379/618
f +39 010 81 83 053

www.blubud.it
c.f. e p.iva 01766240996
Reg. impr. Genova REA 43442